

Various Controller

Supplied variety of controllers as options, such as individual controller, central controller, and building management controller.

Individual Controller



Central Controller



* The temperature setting is discharged air temperature setting. The air volume is set to a constant speed.

Model : ARXH054GTAH / ARXH072GTAH / ARXH096GTAH Production by order



ARXH054GTAH



ARXH072GTAH



ARXH096GTAH

Specifications

Model name			ARXH054GTAH	ARXH072GTAH	ARXH096GTAH
Power source		V/Ø/Hz	230/1/50	230/1/50	230/1/50
Capacity	Cooling	kW	14.0	22.4	28.0
	Heating	kW	8.9	13.9	17.4
Input Power	Cooling/Heating	W	179	292	370
Airflow Rate		m ³ /h	1,080	1,680	2,100
Static Pressure	Standard (range)	Pa	185 (50-185)	200 (50-200)	200 (50-240)
Sound Pressure Level		dB (A)	42	44	47
Dimensions (H x W x D)		mm	425×1,367×572	425×1,367×572	450×1,583×700
Weight		kg	48	55	71
Connection Pipe Diameter (Small / Large)		mm	Ø9.52/Ø19.05	Ø12.70/Ø22.22	Ø12.70/Ø22.22
Operation Range	Cooling	°CDB	5 to 43	5 to 43	5 to 43
	Heating	°CDB	-7 to 21	-7 to 21	-7 to 21
Refrigerant			R410A	R410A	R410A

Note : Specifications are based on the following conditions.


Cooling : Outdoor temperature of 33°CDB / 28°CWB.
Heating : Outdoor temperature of 0°CDB / -2.9°CWB.

Pipe length : 7.5 m Voltage : 230 [V].


Dimensions

(Unit : mm)

ARXH054GTAH

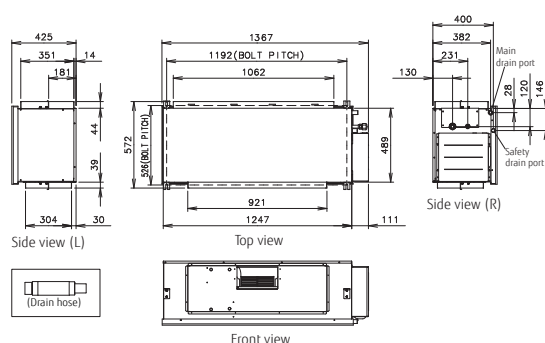

ARXH072GTAH

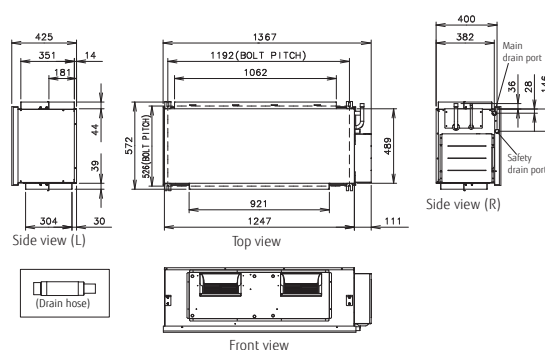

ARXH096GTAH

